

The home page of Toaster in its 1.5 incarnation. It is divided into two sections: one for recent builds, and another one for all builds.


<http://yoctoproject.org/toaster/index.html>

Recent builds

| | | | |
|---------------------------------|------------|----------------------|----------------------|
| core-image-sato (+3) qemux86 | ETA: 16:34 | | |
| core-image-minimal qemuarm | ETA: 15:52 | | |
| core-image-sato atom-pc (15:22) | 4 warnings | Build time: 00:36:55 | |
| core-image-x11 qemux86 (12:01) | 3 errors | 10 warnings | Build time: 00:27:45 |
| core-image-sato atom-pc (11:54) | 4 warnings | Build time: 00:36:55 | |

All builds

| Outcome | Target | Machine | Completed on | Failed tasks | Errors | Warnings | Output |
|--|------------|---------|-------------------|----------------------------|----------|-------------|----------------------------|
| core-image-sato | atom-pc | | 11/06/13 at 15:22 | | | 4 warnings | ext3, hddimg, iso, tar.bz2 |
| core-image-x11 | qemux86 | | 11/06/13 at 12:01 | do_configure acl_2.2.51-r3 | 3 errors | 10 warnings | |
| core-image-sato | atom-pc | | 11/06/13 at 11:54 | | | 4 warnings | ext3, hddimg, iso |
| busybox | qemux86-64 | | 04/12/13 at 10:08 | | | | |
| busybox | qemux86-64 | | 04/12/13 at 09:58 | | | | |
| core-image-minimal | qemux86 | | 10/06/13 at 17:16 | | | | ext3, tar.bz2 |
| core-image-realtime-sdk | fri2 | | 10/06/13 at 17:34 | | | | ext3, tar.bz2 |
| core-image-minimal | qemuarm | | 10/06/13 at 14:02 | | | 5 warnings | ext3, tar.bz2 |
| core-image-minimal core-image-sato core-image-sato-sdk core-image-x11 | qemux86 | | 10/06/13 at 11:31 | | | 2 warnings | ext3, tar.bz2 |
| core-image-minimal | qemumips64 | | 10/06/13 at 09:47 | do_configure acl_2.2.51-r3 | 1 error | | |
| core-image-minimal | qemuppc | | 09/06/13 at 18:25 | | | | ext3, tar.bz2 |
| core-image-minimal | qemux86-64 | | 08/06/13 at 13:17 | | | 2 warnings | ext3, tar.bz2 |

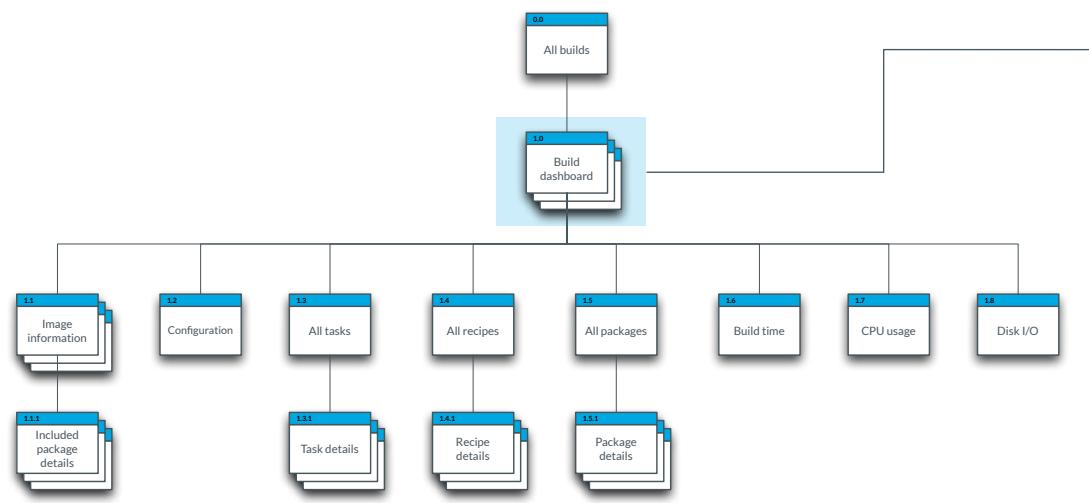

An overview of the outcome and data existing for a certain build. There is one instance of the Build dashboard for each build in Toaster.

<http://yoctoproject.org/toaster/build-dashboard.html>
<http://yoctoproject.org/toaster/build-dashboard-failed.html>
<http://www.yoctoproject.org/toaster/build-dashboard-multitarget.html>

yocto PROJECT Toaster [Toaster manual](#)

All builds → core-image-sato atom-pc (11/06/13 at 15:22)

core-image-sato atom-pc

Completed on 11/06/13 at 15:22 with ⚠ 4 warnings Build time: 00:36:55

Images

core-image-sato

Packages included: 64
 Total package size: 32 MB
 Image files: core-image-sato-atom-pc-20130611152226.hddimg (42.8 MB), core-image-sato-atom-pc-20130611152226.iso (44.1 MB), core-image-sato-atom-pc-20130611152226.rootfs.ext3 (90.5 MB), core-image-sato-atom-pc-20130611152226.rootfs.tar.bz2 (21.5 MB)

Build summary

Configuration

Machine: atom-pc
 Distro: poky
 Layers: meta-yocto, meta-yocto-bsp, openembedded-core


Tasks

Total number of tasks: 2011
 Tasks executed: 701
 Tasks not executed: 1310
 Reuse: 65%

Recipes & Packages

Recipes built: 114
 Packages built: 325

⚠ 4 warnings

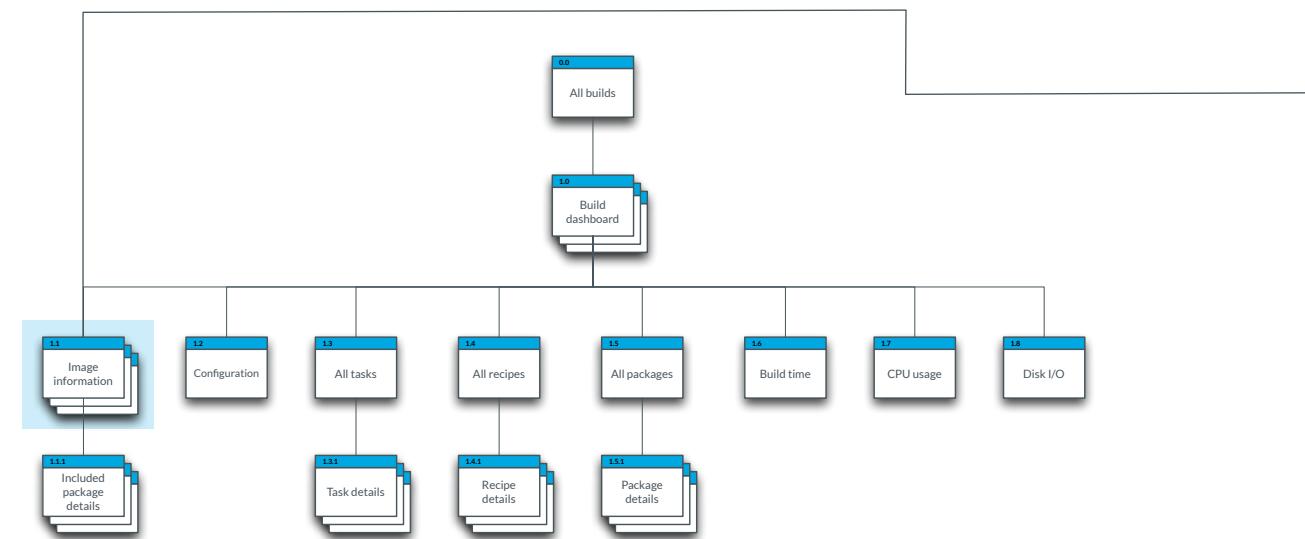

Packages installed and directory structure for each of the target images built. There is one instance of this page per build target. If none of the build targets is an image, the page does not exist for such build.

<http://www.yoctoproject.org/toaster/image-information-packages.html>

yocto · Toaster [Toaster manual](#)


All builds → core-image-sato atom-pc (11/06/13 at 15:22) → core-image-sato

core-image-sato

● Packages included (64 - 32MB) ● Directory structure


Search packages included Search Edit columns ▾ Show rows: 25 ▾

| ● Package ▾ | ● Package version ▾ | ● Size ▾ | ● Depends ▾ | ● Brought in by ▾ | ● Recipe ▾ |
|---------------------------|-----------------------------------|----------|-------------|-------------------|------------------------|
| base-files | 3.0.14-r73 | 228 KB | | 1 | base-files |
| base-passwd | 3.5.26-r2 | 0 KB | | 1 | base-passwd |
| busybox | 1.21.1-r0 | 556 KB | 2 | 1 | busybox |
| busybox-hwclock | 1.21.1-r0 | 16 KB | | 1 | busybox |
| busybox-syslog | 1.21.1-r0 | 24 KB | 1 | 1 | busybox |
| busybox-udhcpc | 1.21.1-r0 | 32 KB | | 1 | busybox |
| eglibc | 2.17-r3 | 3.1 MB | | 10 | eglibc |
| init-ifupdown | 1.0-r0 | 44 KB | 1 | 1 | init-ifupdown |
| initscripts | 1.0-r140 | 164 KB | 1 | 1 | initscripts |
| kernel-base | 3.8.11+git8482dcdf68_0+dd089cb5ba | 32 KB | | 4 | linux-yocto |
| kernel-module-cfbcopyarea | 3.8.11+git8482dcdf68_0+dd089cb5ba | 36 KB | 1 | 1 | linux-yocto |
| kernel-module-cfbfillrect | 3.8.11+git8482dcdf68_0+dd089cb5ba | 36 KB | 1 | 1 | linux-yocto |
| kernel-module-cfbimgbit | 3.8.11+git8482dcdf68_0+dd089cb5ba | 32 KB | 1 | 1 | linux-yocto |
| kernel-module-uvesafb | 3.8.11+git8482dcdf68_0+dd089cb5ba | 64 KB | 4 | 1 | linux-yocto |
| libkmod | 9-r0.0 | 104 KB | 1 | 2 | kmod |
| modutils-initscripts | 1.0-r6 | 16 KB | | 1 | modutils-initscripts |
| netbase | 5.1-r0 | 40 KB | | 2 | netbase |
| packagegroup-core-boot | 1.0-r11 | 0 B | 13 | | packagegroup-core-boot |
| pciutils-ids | 3.2.0-r0 | 212 KB | | 1 | pciutils |

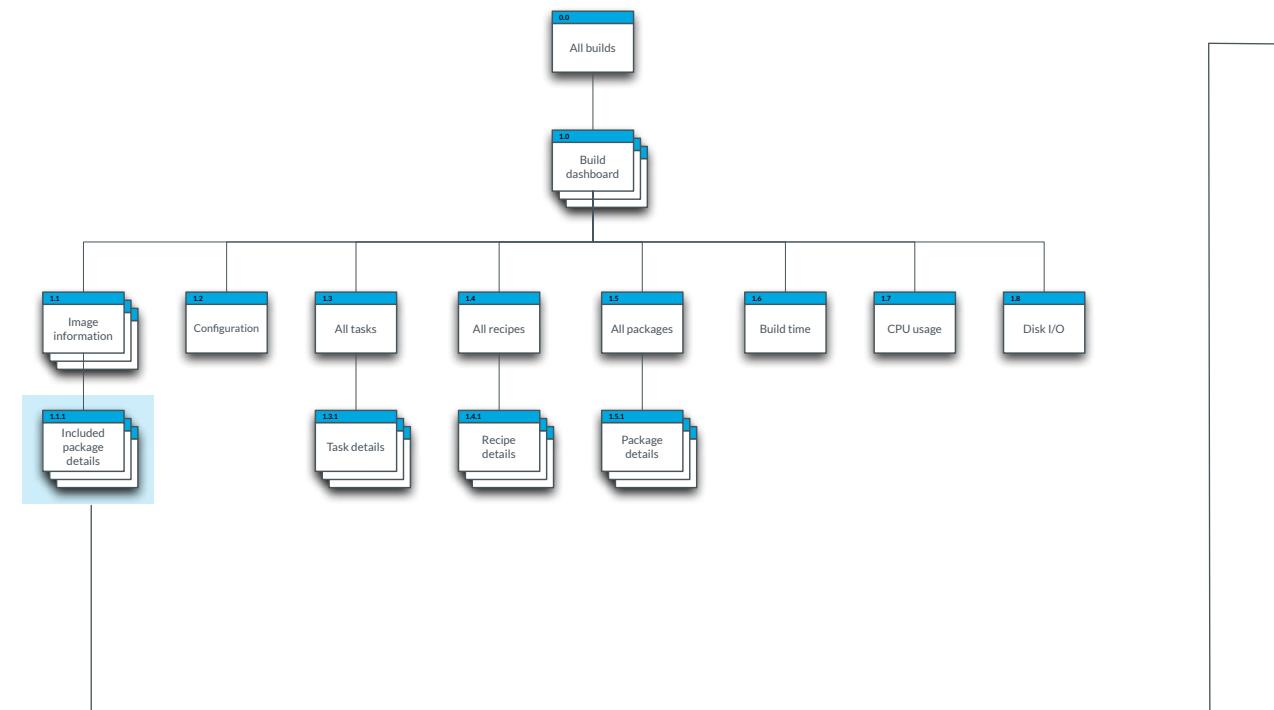

All information available about a package included in a certain image. It provides information about files in the image root file system and run-time dependencies. There is one instance of this page for each image in which a package is installed.

<http://www.yoctoproject.org/toaster/package-included-details.html>

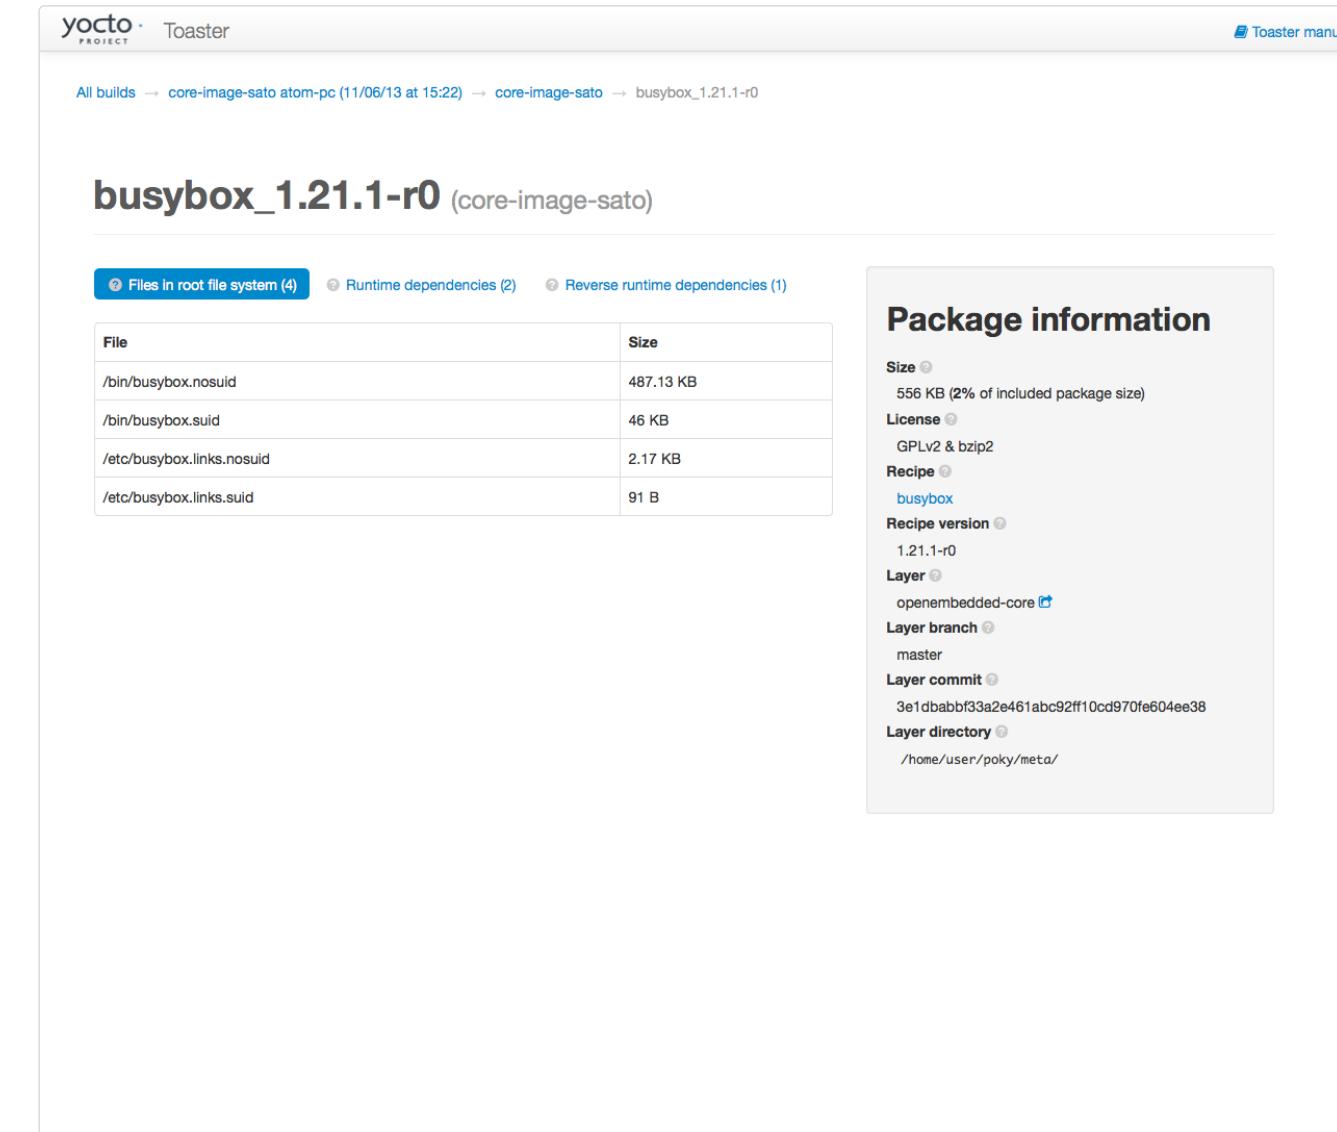

yocto • Toaster

All builds → core-image-sato atom-pc (11/06/13 at 15:22) → core-image-sato → busybox_1.21.1-r0

busybox_1.21.1-r0 (core-image-sato)

[Files in root file system \(4\)](#) [Runtime dependencies \(2\)](#) [Reverse runtime dependencies \(1\)](#)

| File | Size |
|---------------------------|-----------|
| /bin/busybox.nosuid | 487.13 KB |
| /bin/busybox.suid | 46 KB |
| /etc/busybox.links.nosuid | 2.17 KB |
| /etc/busybox.links.suid | 91 B |

Package information

Size 556 KB (2% of included package size)

License GPLv2 & bzip2

Recipe busybox


Recipe version 1.21.1-r0

Layer openembedded-core

Layer branch master

Layer commit 3e1dbabbf33a2e461abc92ff10cd970fe604ee38

Layer directory /home/user/poky/meta/

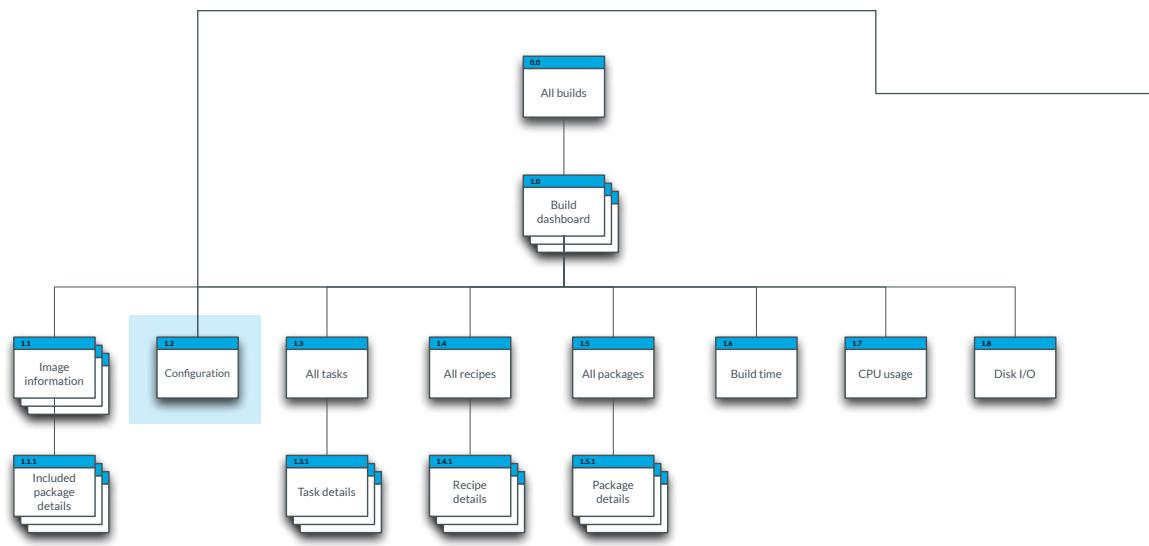

All configuration details available for a certain build. The page has two sections: a configuration summary and a table showing variable / value pairs applied to the build.

<http://yoctoproject.org/toaster/build-configuration.html>

yocto · Toaster

All builds → core-image-sato atom-pc (11/06/13 at 15:22) → Configuration

Configuration


Build configuration

BitBake version 1.19.1
 Build system x86_64-linux
 Host distribution Ubuntu-12.04
 Target system i586-poky-linux
 Machine atom-pc
 Distro poky
 Distro version 1.4+snapshot-20130718
 Tune features m32 i586
 Target(s) core-image-sato

Layers

| Layer | Layer branch | Layer commit | Layer directory |
|-------------------|--------------|--------------|---------------------------------|
| meta-yocto | master | 3e1dbabb3... | /home/user/poky/meta-yocto/ |
| meta-yocto-bsp | master | 3e1dbabb3... | /home/user/poky/meta-yocto-bsp/ |
| openembedded-core | master | 3e1dbabb3... | /home/user/poky/meta/ |

Toaster manual

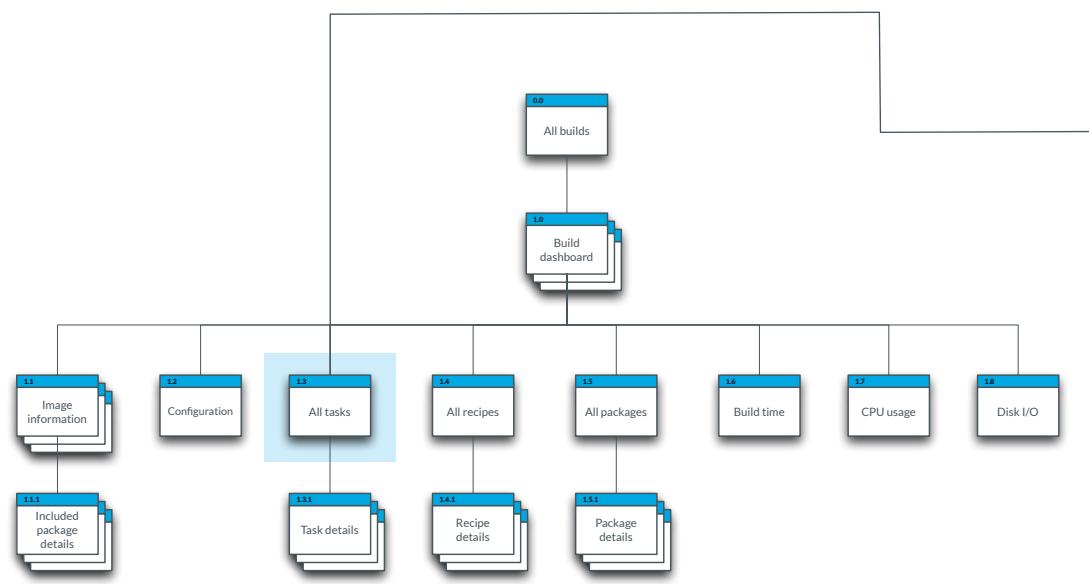

→ A table listing all the tasks for a certain build.

<http://yoctoproject.org/toaster/all-tasks.html>

yocto PROJECT Toaster


All builds → core-image-sato atom-pc (11/06/13 at 15:22) → All tasks

Tasks

Search tasks Search Edit columns ▾ Show rows: 25 ▾

| Order | Recipe | Task | Executed | Outcome | Cache attempt |
|-------|-------------------|----------------------|--------------|-----------|-------------------|
| 1 | quilt-native | do_fetch | Executed | Succeeded | |
| 2 | opkg | do_configure | Executed | Failed | |
| 3 | attr | do_unpack | Not executed | Covered | |
| 4 | apr-native | do_package_write | Not executed | Empty | |
| 5 | base-files | do_unpack | Not executed | Prebuilt | |
| 6 | opkg-config-base | do_populate_sysroot | Executed | Succeeded | File not in cache |
| 7 | opkg-config-base | do_populate_sysroot | Executed | Succeeded | Failed |
| 8 | quilt-native | do_populate_sysroot | Not executed | Prebuilt | |
| 9 | quilt-native | do_populate_sysroot | Executed | Cached | Succeeded |
| 10 | busybox | do_patch | Executed | Succeeded | |
| 11 | busybox | do_configure | Executed | Succeeded | |
| 12 | busybox | do_compile | Executed | Succeeded | |
| 13 | busybox | do_install | Executed | Succeeded | |
| 14 | busybox | do_package | Executed | Succeeded | |
| 15 | busybox | do_packagedata | Executed | Succeeded | |
| 16 | busybox | do_package_write_rpm | Executed | Succeeded | |
| 17 | busybox | do_package_write_rpm | Executed | Succeeded | |
| 18 | busybox | do_package_write | Executed | Succeeded | |
| 19 | busybox | do_populate_lic | Executed | Succeeded | |
| 20 | busybox | do_populate_sysroot | Executed | Succeeded | |
| 21 | busybox | do_build | Executed | Succeeded | |
| 22 | gcc-cross | do_fetch | Not executed | Prebuilt | |
| 23 | gcc-cross | do_unpack | Not executed | Prebuilt | |
| 24 | gcc-cross | do_patch | Not executed | Prebuilt | |
| 25 | kern-tools-native | do_packagedata | Not executed | Covered | |

← Previous 1 2 3 4 5 Next → Show rows: 25 ▾

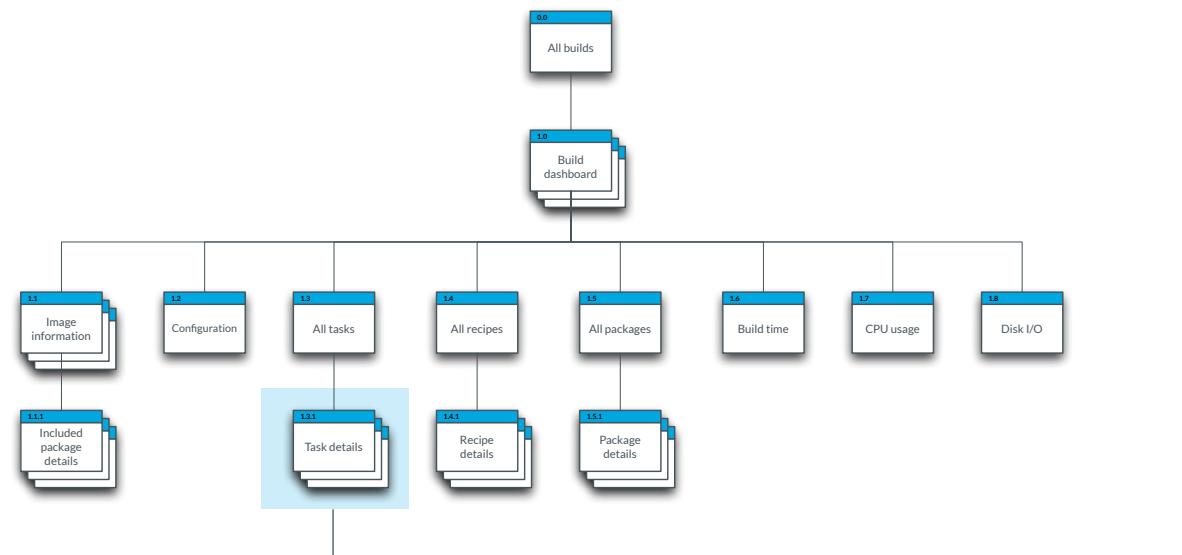

A page providing all information available for a certain task. There is one instance of the task details page for each task shown in the '1.3 All tasks' page.

<http://www.yoctoproject.org/toaster/task-details-executed-success.html>
<http://www.yoctoproject.org/toaster/task-details-executed-fail.html>
<http://www.yoctoproject.org/toaster/task-details-executed-sstate-success.html>
<http://www.yoctoproject.org/toaster/task-details-executed-sstate-missed.html>
<http://www.yoctoproject.org/toaster/task-details-executed-sstate-failed.html>
<http://www.yoctoproject.org/toaster/task-details-notexecuted-covered.html>
<http://www.yoctoproject.org/toaster/task-details-notexecuted-noexec.html>
<http://www.yoctoproject.org/toaster/task-details-notexecuted-prebuilt.html>

yocto · Toaster

All builds → core-image-sato atom-pc (11/06/13 at 15:22) → Tasks → acl_2.2.51-r3 do_configure

acl_2.2.51-r3 do_configure

Failed 

 [Log file](#) /home/user/poky/build/tmp/work/i586-poky-linux/acl/2.2.51-r3/temp/log.do_configure
 /home/user/poky/path/to/config.log

Python stack trace

```
File: '<code>', lineno: 7, function: '<module>'  

  0003:__anon_227__home_yocto_poky_meta_classes_package_bbclass(d)  

  0004:__anon_1132__home_yocto_poky_meta_classes_package_rpm_bbclass(d)  

  0005:__anon_921__home_yocto_poky_meta_classes_insane_bbclass(d)  

  0006:__anon_20__home_yocto_poky_meta_classes_debian_bbclass(d)  


*** 0007:__anon_27__home_yocto_poky_meta_classes_devshe1_bbclass(d)  

  0008:__anon_76__home_yocto_poky_meta_classes_sstate_bbclass(d)  

  0009:__anon_202__home_yocto_poky_meta_classes_rootfs_rpm_bbclass(d) ...
```

Executed 

 [Task inputs signature](#) 6ef1b44fb0d9c59b6e7ec342199d3d10
 [Task order](#) 2
 [Task script type](#) Python
 [Task script file](#) /path/to/script/file/
 [Task starts at line](#) 666
 [Task depends on](#) acl_2.2.51-r3 do_patch
 attr_2.4.47-r0 do_populate_sysroot
 autoconf-native_2.69-r11 do_populate_sysroot
 autotools-native_1.13.4-r0 do_populate_sysroot
 eglibc_2.18-r0 do_populate_sysroot
 gcc-runtime_4.8.2-r0 do_populate_sysroot
 gettext_0.18.3.1-r0 do_populate_sysroot
 gettext-minimal-native_0.18.3.1-r0 do_populate_sysroot
 gnu-config-native_20120814-r0 do_populate_sysroot
 libtool-cross_2.4.2-r6.1 do_populate_sysroot

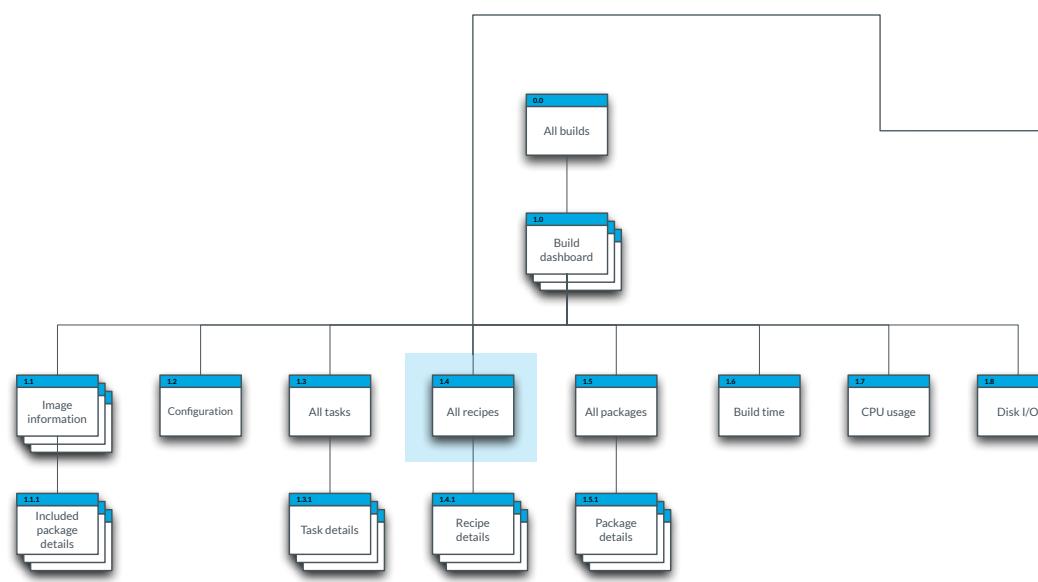

→ A table listing all the targets built during a certain build.

<http://yoctoproject.org/toaster/all-recipes.html>

yocto · Toaster

All builds → core-image-sato atom-pc (11/06/13 at 15:22) → Recipes

Recipes

IMAGES
core-image-sato

BUILD

Configuration

Tasks

Recipes

Packages

PERFORMANCE


Time

CPU usage

Disk I/O

Search recipes Search Edit columns Show rows: 25

| Recipe | Recipe version | Recipe file | Section | License | Layer |
|-----------------|----------------|--|-----------------|-------------------|-------------------|
| acl | 2.2.51-r3 | home/user/poky/meta/recipes-support/attr/acl_2.2.51.bb | libs | GPLv2,1+ & GPLv2+ | openembedded-core |
| acl-native | 2.2.51-r3 | home/user/poky/meta/recipes-support/attr/acl_2.2.51.bb | libs | GPLV2,1+ & GPLv2+ | openembedded-core |
| alsa-lib-native | 1.0.26 | home/user/poky/meta/recipes-multimedia/alsa/alsa-lib_1.0.26.bb | libs/multimedia | GPLV2,1 & GPLv2+ | openembedded-core |
| apr-native | 1.4.6 | home/user/poky/meta/recipes-support/apr/apr_1.4.6.bb | libs | Apache-2.0 | openembedded-core |
| apr-util-native | 1.5.1 | home/user/poky/meta/recipes-support/apr/apr-util_1.5.1.bb | libs | Apache-2.0 | openembedded-core |
| attr | 2.4.46 | home/user/poky/meta/recipes-support/attr/attr_2.4.46.bb | libs | GPLV2,1+ & GPLv2+ | openembedded-core |
| attr-native | 2.4.46 | home/user/poky/meta/recipes-support/attr/attr_2.4.46.bb | libs | GPLV2,1+ & GPLv2+ | openembedded-core |
| autoconf-native | 2.69 | home/user/poky/meta/recipes-devtools/autoconf/autoconf_2.69.bb | devel | GPLV2 & GPLv3 | openembedded-core |
| automake-native | 1.12.6 | home/user/poky/meta/recipes-devtools/automake/automake_1.12.6.bb | devel | GPLV2 | openembedded-core |
| base-files | 3.0.14 | home/user/poky/meta/recipes-core/base-files/base-files_3.0.14.bb | base | GPLV2 | openembedded-core |
| base-passwd | 3.5.26 | home/user/poky/meta/recipes-core/base-passwd/base-passwd_3.5.26.bb | base | GPLV2+ | openembedded-core |
| bcrypt-native | 4.2.1 | home/user/poky/meta/recipes-support/bcrypt/bcrypt_4.2.1.bb | base | GPLV2 & GPLv2.1 | openembedded-core |
| binutils-cross | 2.23.2 | home/user/poky/meta/recipes-devtools/binutils/binutils-cross_2.23.2.bb | devel | GPLV3 | openembedded-core |
| binutils-native | 2.23.2 | home/user/poky/meta/recipes-devtools/binutils/binutils_2.23.2.bb | devel | GPLV3 | openembedded-core |
| bison-native | 2.7.1 | home/user/poky/meta/recipes-devtools/bison/bison_2.7.1.bb | devel | GPLV3 | openembedded-core |
| busybox | 1.21.1 | home/user/poky/meta/recipes-core/busybox/busybox_1.21.1.bb | base | GPLV2 & bzip2 | openembedded-core |
| bzip2-native | 1.0.6 | home/user/poky/meta/recipes-extended/bzip2/bzip2_1.0.6.bb | console/utils | bzip2 | openembedded-core |

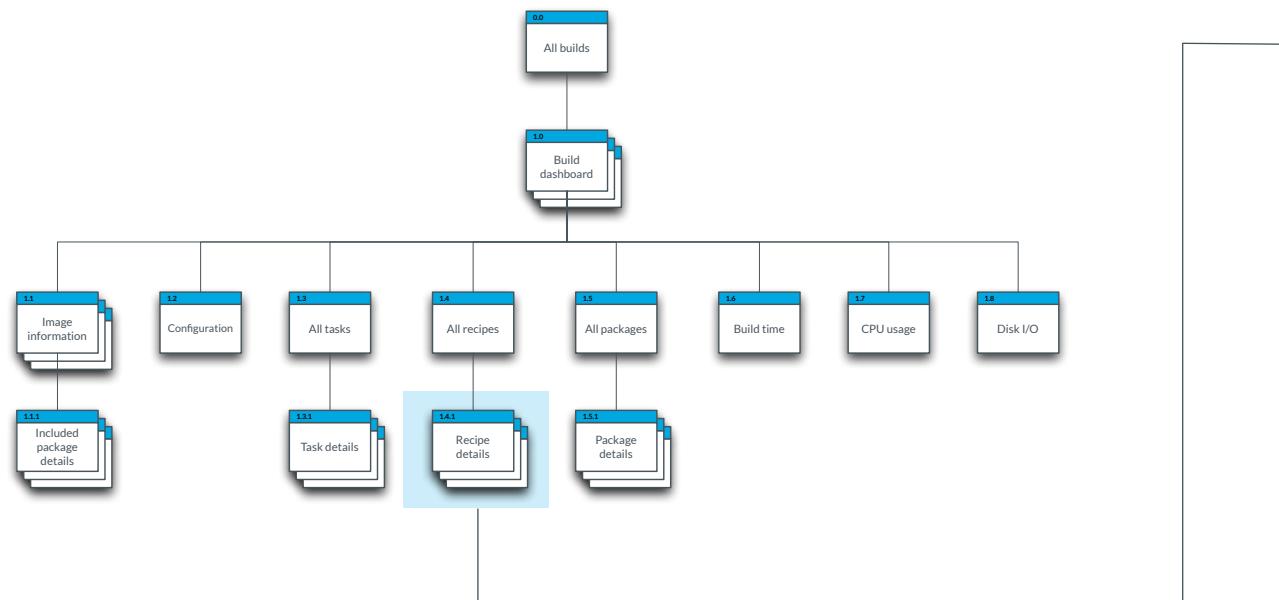

All information available about a built target. There is one instance of the recipe details page for each target shown in the '1.4 All recipes' page.

<http://yoctoproject.org/toaster/recipe-details-busybox.html>

yocto • Toaster [Toaster manual](#)

All builds → core-image-sato atom-pc (11/06/13 at 15:22) → Recipes → busybox_1.21.1-r0

busybox_1.21.1-r0

[Recipe details](#) [Packages \(12\)](#) [Build dependencies \(2\)](#) [Reverse build dependencies \(1\)](#)

Recipe file /home/user/poky/meta/recipes-core/busybox/busybox_1.21.1.bb
Work directory /home/user/poky/build/tmp/work/qemux86-poky-linux/busybox/1.21.1-r0/
Layer openembedded-core
Layer branch master
Layer commit 3e1dbabff33a2e461abc92ff10cd970fe604ee38
Layer directory /home/user/poky/meta/

Tasks


| Order | Task | Executed | Outcome |
|-------|----------------------|--------------|-----------|
| 765 | do_fetch | Not executed | Prebuilt |
| 766 | do_unpack | Not executed | Prebuilt |
| 767 | do_patch | Executed | Succeeded |
| 777 | do_configure | Executed | Failed |
| 829 | do_compile | Executed | Succeeded |
| 835 | do_install | Executed | Succeeded |
| 849 | do_package | Executed | Succeeded |
| 958 | do_package_data | Executed | Succeeded |
| 1013 | do_populate_sysroot | Executed | Succeeded |
| 1404 | do_package_write_rpm | Executed | Succeeded |
| 1492 | do_package_write | Executed | Succeeded |
| 1801 | do_populate_lic | Not executed | Covered |
| 1802 | do_build | Executed | Succeeded |

About busybox

Summary
 Tiny versions of many common UNIX utilities in a single small executable.

Description
 BusyBox combines tiny versions of many common UNIX utilities into a single small executable. It provides minimalist replacements for most of the utilities you usually find in GNU fileutils, shellutils, etc. The utilities in BusyBox generally have fewer options than their full-featured GNU cousins; however, the options that are included provide the expected functionality and behave very much like their GNU counterparts. BusyBox provides a fairly complete POSIX environment for any small or embedded system.

Homepage <http://www.busybox.net>
Bugtracker <https://bugs.busybox.net/>
Section [base](#)
License GPLv2 & bzip2

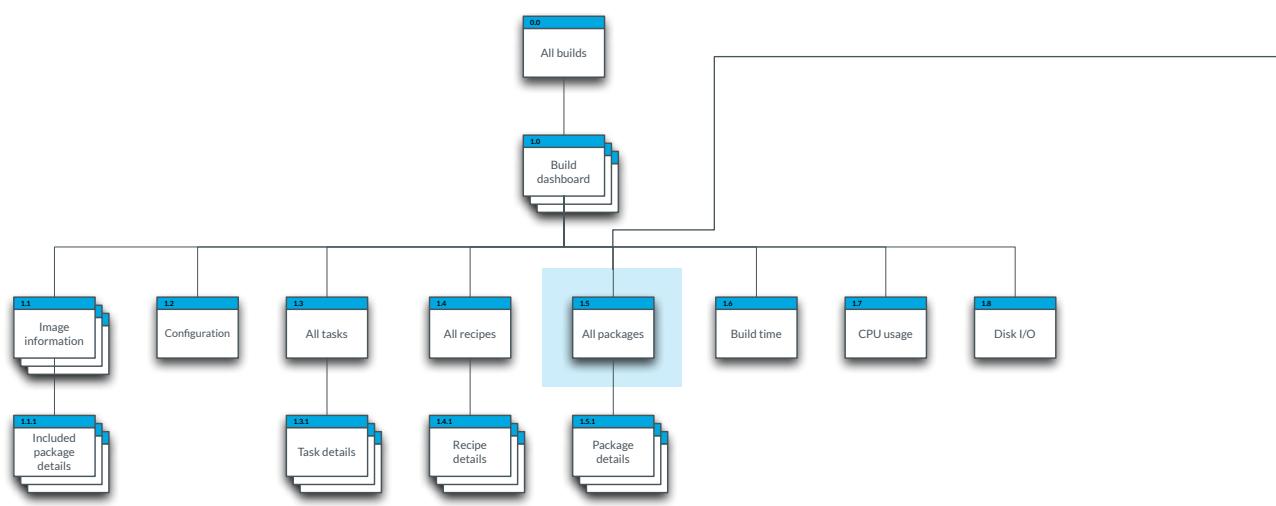

A table listing all the packages built during a certain build. This page does not provide run-time dependency information, which is available in '1.1 Image information' for each target image built.

<http://yoctoproject.org/toaster/all-packages.html>

yocto · Toaster [Toaster manual](#)

All builds → core-image-sato atom-pc (11/06/13 at 15:22) → Packages


Packages

IMAGES
core-image-sato

BUILD
Configuration
Tasks
Recipes
Packages

PERFORMANCE
Time
CPU usage
Disk I/O

| Package | Package version | Size | Recipe |
|---------------------------|-----------------------------------|--------|------------------------|
| base-files | 3.0.14-r73 | 228 KB | base-files |
| base-passwd | 3.5.26-r2 | 0 KB | base-passwd |
| base-passwd-doc | 3.5.26-r2 | 64 KB | base-passwd |
| busybox | 1.21.1-r0 | 556 KB | busybox |
| busybox-hwclock | 1.21.1-r0 | 16 KB | busybox |
| busybox-syslog | 1.21.1-r0 | 20 KB | busybox |
| busybox-udhcpc | 1.21.1-r0 | 32 KB | busybox |
| eglibc | 2.17-r3 | 3.1 MB | eglibc |
| init-ifupdown | 1.0-r0 | 44 KB | init-ifupdown |
| initscripts | 1.0-r140 | 164 KB | initscripts |
| kernel-base | 3.8.11+git8482dcdf68_0+dd089cb5ba | 32 KB | linux-yocto |
| kernel-module-cfbcopyarea | 3.8.11+git8482dcdf68_0+dd089cb5ba | 36 KB | linux-yocto |
| kernel-module-cfbfillrect | 3.8.11+git8482dcdf68_0+dd089cb5ba | 36 KB | linux-yocto |
| kernel-module-cfbimgblt | 3.8.11+git8482dcdf68_0+dd089cb5ba | 32 KB | linux-yocto |
| kernel-module-uvesafb | 3.8.11+git8482dcdf68_0+dd089cb5ba | 64 KB | linux-yocto |
| libkmod | 9-r0.0 | 104 KB | kmod |
| modutils-initscripts | 1.0-r6 | 16 KB | modutils-initscripts |
| netbase | 5.1-r0 | 40 KB | netbase |
| packagegroup-core-boot | 1.0-r11 | 0 B | packagegroup-core-boot |
| pciutils-ids | 3.2.0-r0 | 212 KB | pciutils |
| rpm-postinsts | 1.0-r0 | 0 B | rpm-postinsts |
| sysvinit | 2.88dsf-r11 | 220 KB | sysvinit |
| sysvinit-inittab | 2.88dsf-r9 | 12 KB | sysvinit-inittab |
| sysvinit-pidof | 2.88dsf-r11 | 28 KB | sysvinit |
| tinylogin | 1.4-r9 | 64 KB | tinylogin |

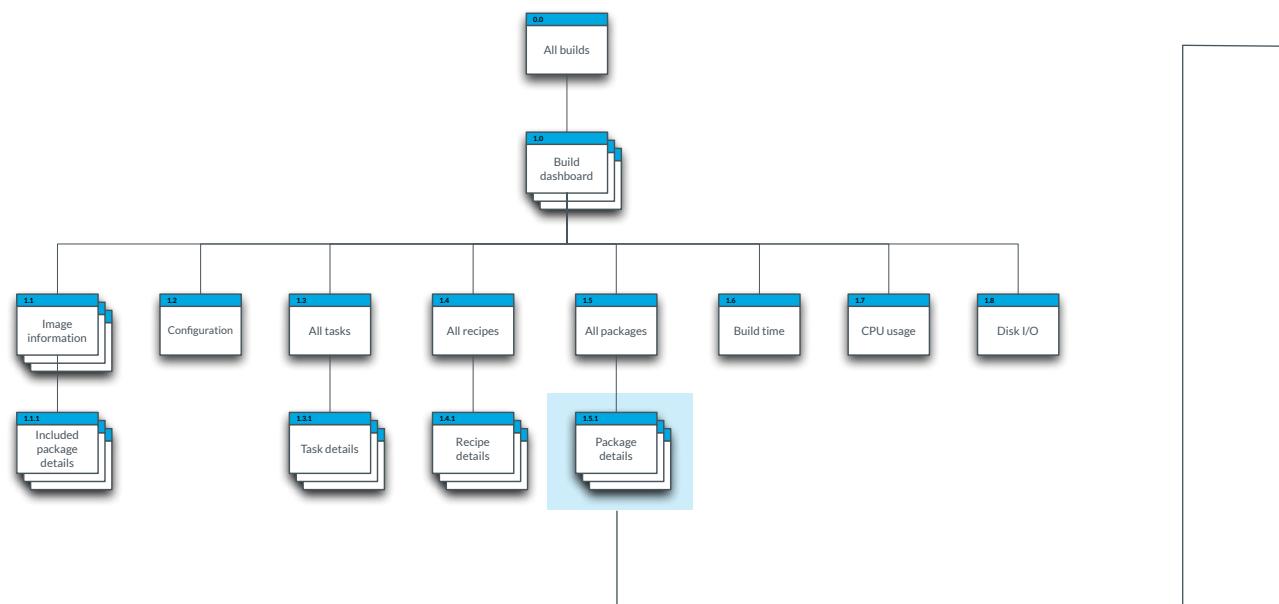

Information about a certain built package. There are 2 versions of this page: for packages included in one or more target images, the page provides a list of the images that include the package. For packages not included in a target image, the page also shows projected run-time dependencies.

<http://www.yoctoproject.org/toaster/package-built-details-included.html>
<http://www.yoctoproject.org/toaster/package-built-details-not-included.html>

yocto Toaster

All builds → core-image-sato atom-pc (11/06/13 at 15:22) → Packages → busybox_1.21.1-r0

busybox_1.21.1-r0

Package included in: [core-image-sato](#)

Package information

Size 556 KB

License GPLv2 & bzip2

Recipe [busybox](#)


Recipe version 1.21.1-r0

Layer openembedded-core

Layer branch master

Layer commit 3e1dbabbf33a2e461abc92ff10cd970fe604ee38

Layer directory /home/user/poky/meta/

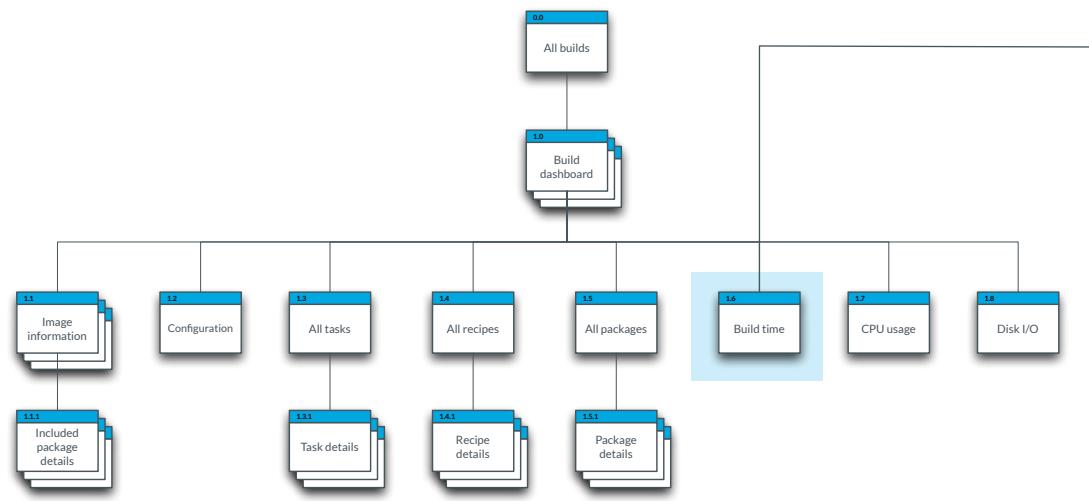

Information about the time a build took (currently broken down per task, but we might consider providing information per recipe too).

<http://yoctoproject.org/toaster/build-time.html>


yocto + Toaster


All builds → core-image-sato atom-pc (11/06/13 at 15:22) → Time

Time

Search time data Edit columns ▾ Show rows: 25 ▾

| Recipe | Task | Executed | Outcome | Time (secs) |
|-------------------|----------------------|--------------|-----------|-------------|
| busybox | do_compile | Executed | Succeeded | 90.26 |
| opkg | do_configure | Executed | Failed | 61.45 |
| busybox | do_configure | Executed | Succeeded | 21.86 |
| busybox | do_package | Executed | Succeeded | 11.19 |
| busybox | do_package_write_rpm | Executed | Succeeded | 9.37 |
| busybox | do_package_write_rpm | Executed | Succeeded | 9.37 |
| busybox | do_package_write | Executed | Succeeded | 9.37 |
| busybox | do_patch | Executed | Succeeded | 2.91 |
| busybox | do_packedata | Executed | Succeeded | 1.51 |
| busybox | do_populate_lic | Executed | Succeeded | 1.27 |
| busybox | do_install | Executed | Succeeded | 1.24 |
| busybox | do_populate_sysroot | Executed | Succeeded | 1.13 |
| busybox | do_build | Executed | Succeeded | 1.13 |
| opkg-config-base | do_populate_sysroot | Executed | Succeeded | 0.95 |
| quilt-native | do_fetch | Executed | Succeeded | 0.56 |
| opkg-config-base | do_populate_sysroot | Executed | Succeeded | 0.16 |
| quilt-native | do_populate_sysroot | Executed | Cached | 0.16 |
| attr | do_unpack | Not executed | Covered | 0 |
| apr-native | do_package_write | Not executed | Empty | 0 |
| base-files | do_unpack | Not executed | Prebuilt | 0 |
| quilt-native | do_populate_sysroot | Not executed | Prebuilt | 0 |
| gcc-cross | do_fetch | Not executed | Prebuilt | 0 |
| gcc-cross | do_unpack | Not executed | Prebuilt | 0 |
| gcc-cross | do_patch | Not executed | Prebuilt | 0 |
| kern-tools-native | do_packedata | Not executed | Covered | 0 |

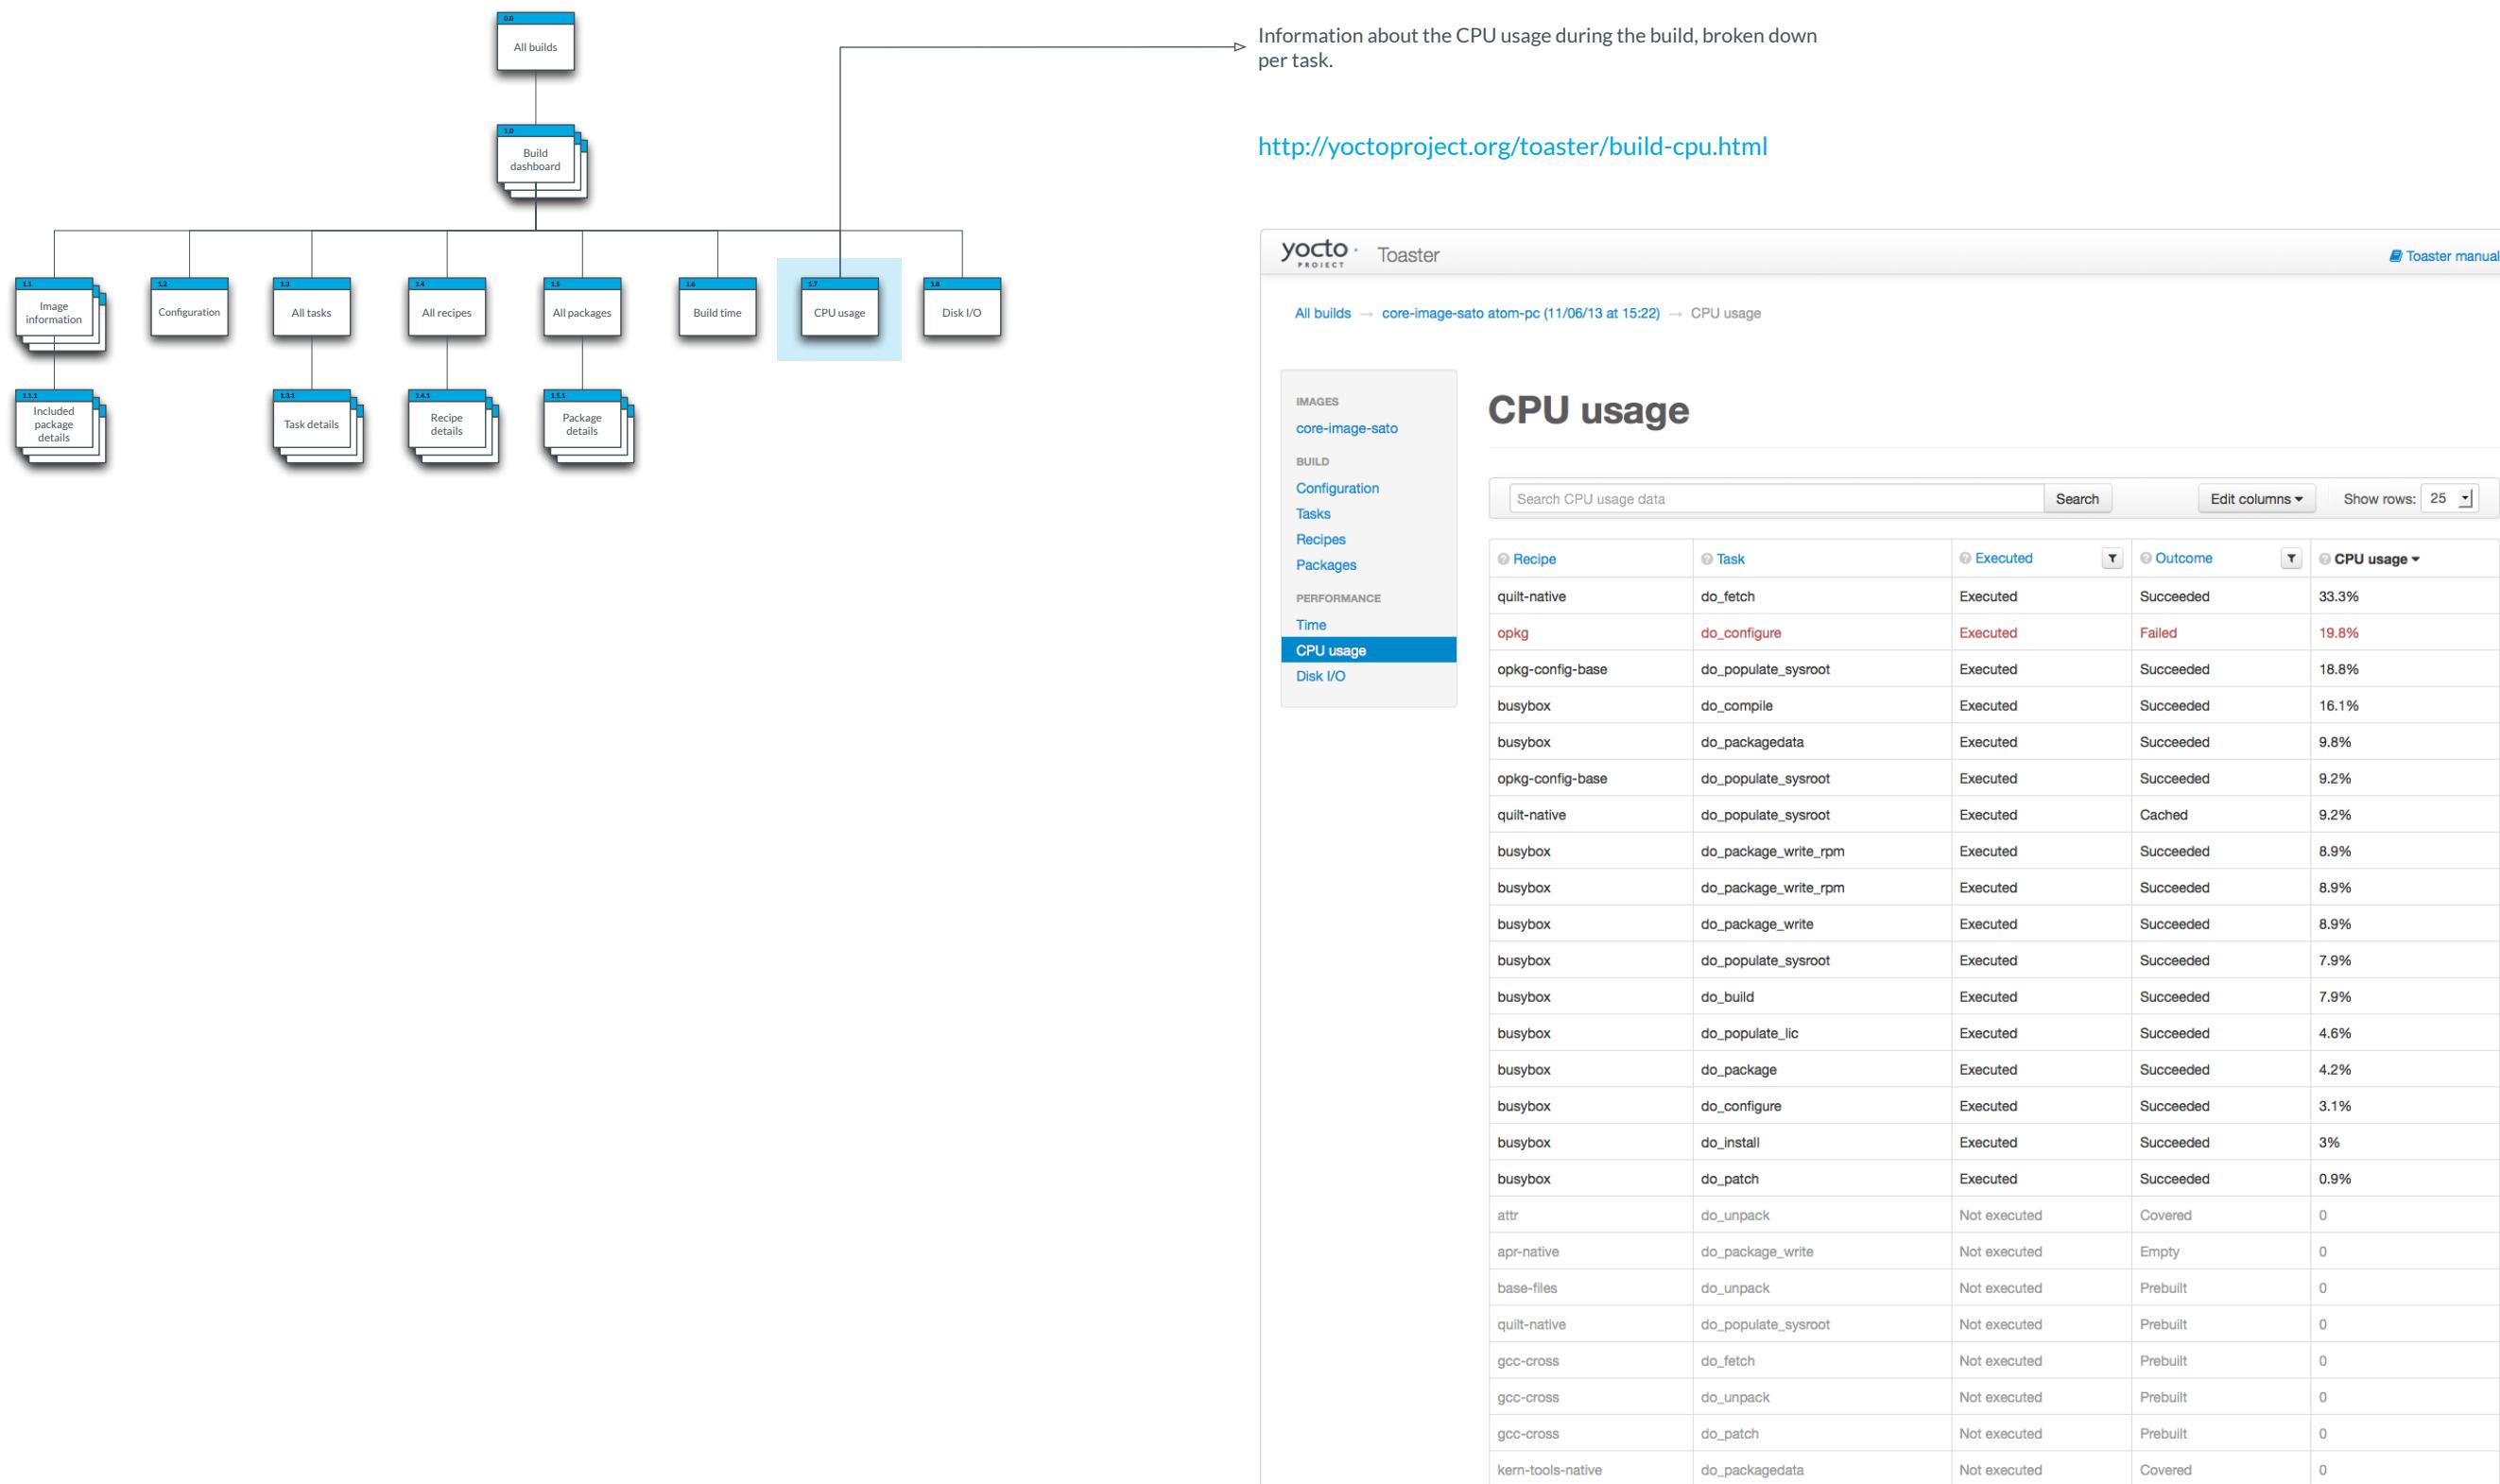

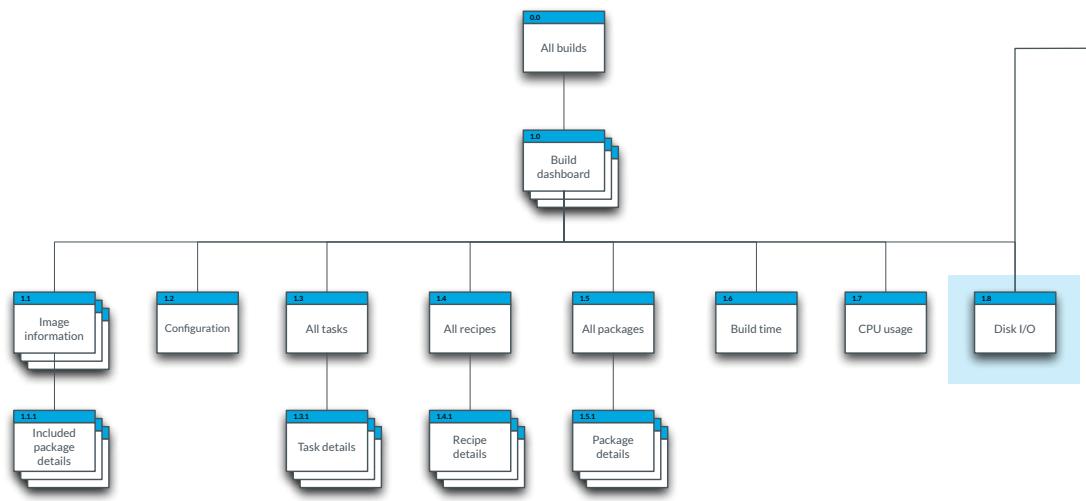

Information about the amount of time spent on I/O operations during the build, broken down per task.

<http://yoctoproject.org/toaster/build-diskio.html>

yocto + Toaster

All builds → core-image-sato atom-pc (11/06/13 at 15:22) → Disk I/O

Disk I/O

Search disk I/O data Edit columns ▾ Show rows: 25 ▾

| Recipe | Task | Executed | Outcome | Disk I/O (ms) |
|-------------------|----------------------|--------------|-----------|---------------|
| busybox | do_compile | Executed | Succeeded | 60076 |
| busybox | do_configure | Executed | Succeeded | 20008 |
| busybox | do_package | Executed | Succeeded | 10712 |
| busybox | do_package_write_rpm | Executed | Succeeded | 8028 |
| busybox | do_package_write_rpm | Executed | Succeeded | 8028 |
| busybox | do_package_write | Executed | Succeeded | 8028 |
| opkg | do_configure | Executed | Failed | 6739 |
| busybox | do_patch | Executed | Succeeded | 2120 |
| busybox | do_install | Executed | Succeeded | 912 |
| opkg-config-base | do_populate_sysroot | Executed | Succeeded | 840 |
| busybox | do_populate_ic | Executed | Succeeded | 700 |
| busybox | do_populate_sysroot | Executed | Succeeded | 664 |
| busybox | do_build | Executed | Succeeded | 664 |
| busybox | do_packedata | Executed | Succeeded | 540 |
| quilt-native | do_populate_sysroot | Executed | Cached | 536 |
| opkg-config-base | do_populate_sysroot | Executed | Succeeded | 200 |
| quilt-native | do_fetch | Executed | Succeeded | 20 |
| attr | do_unpack | Not executed | Covered | 0 |
| apr-native | do_package_write | Not executed | Empty | 0 |
| base-files | do_unpack | Not executed | Prebuilt | 0 |
| quilt-native | do_populate_sysroot | Not executed | Prebuilt | 0 |
| gcc-cross | do_fetch | Not executed | Prebuilt | 0 |
| gcc-cross | do_unpack | Not executed | Prebuilt | 0 |
| gcc-cross | do_patch | Not executed | Prebuilt | 0 |
| kern-tools-native | do_packedata | Not executed | Covered | 0 |